

SPECIFICATIONS

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DIGITAL CAMERA FinePix S1000fd           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Number of effective pixels <sup>*1</sup> | 10.0 million pixels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| CCD sensor                               | 1/2.3-inch CCD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Storage media                            | Internal memory (Approx. 24MB) / xD-Picture Card™ (16MB - 2 GB) / SD memory card / SDHC memory card <sup>*2</sup>                                                                                                                                                                                                                                                                                                                                                                                                    |
| File format                              | Still image: JPEG (Exif Ver. 2.2 <sup>*3</sup> )<br>Movie: AVI (Motion JPEG) with sound<br>Audio: WAVE format, Monaural sound<br>[Design rule for Camera File system compliant/DPOF-compatible]                                                                                                                                                                                                                                                                                                                      |
| Number of recorded pixels                | Still image: 3648×2736 / 3648×2432 (3:2 format) / 2592×1944 / 2048×1536 / 1600×1200 / 640×480 pixels                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Lens                                     | Fujinon 12× Optical zoom lens, F2.8 (Wide) - F5.0 (Telephoto)                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Lens focal length                        | f=5.9mm - 70.8mm, Equivalent to 33 - 396mm on a 35mm camera                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Aperture                                 | F2.8 - F5.6 (Wide) / F5.0 - F8.0 (Telephoto), max 5 steps in 1/3 EV increment                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Digital zoom                             | Approx. 5.7×                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Focus distance                           | Normal: Wide angle: Approx. 40cm / 1.3 ft. to infinity<br>Telephoto: Approx. 1.5m / 4.9 ft. to infinity<br>Macro: Wide angle: Approx. 5cm / 2.0 in. to 3m / 9.8 ft.<br>Telephoto: Approx. 80cm / 2.6 ft. to 3m / 9.8 ft.<br>Super Macro: Approx. 2cm / 0.8 in. to 1m / 3.3 ft.                                                                                                                                                                                                                                       |
| Sensitivity                              | Auto / Auto (800) / Auto (400) / Equivalent to ISO 64 / 100 / 200 / 400 / 800 / 1600 (Standard Output Sensitivity)                                                                                                                                                                                                                                                                                                                                                                                                   |
| Exposure control                         | TTL 256-zones metering                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Exposure modes                           | Programmed AE, Aperture Priority AE, Shutter Priority AE                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Shooting modes                           | Mode dial: Auto, Natural Light, SP1, SP2, P, A, S, M, Panorama, Movie<br>SP1 / SP2: Portrait, Landscape, Sport, Night, Fireworks, Sunset, Snow, Beach, Museum, Party, Flower, Text, PS (Picture Stabilization)                                                                                                                                                                                                                                                                                                       |
| Shutter speed                            | 1/4 sec. to 1/2000 sec. (Auto mode)<br>8 sec. to 1/2000 sec. (All other modes)                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Continuous shooting                      | Top-3 (max. 1.4 frames/sec.), Last-3 (max. 1.4 frames/sec.),<br>Long-period (max. 0.5 frames/sec.)<br>Top-6, High speed (max. 3.3 frames/sec., 5M pixels)<br>Top-15, Ultra High speed (max. 7.5 frames/sec., 2M pixels)                                                                                                                                                                                                                                                                                              |
| Focus                                    | Auto focus (Area, Multi, Center) / Continuous AF / Manual focus<br>AF assist illuminator available                                                                                                                                                                                                                                                                                                                                                                                                                   |
| White balance                            | Automatic scene recognition<br>Preset (Fine, Shade, Fluorescent light (Daylight), Fluorescent light (Warm White), Fluorescent light (Cool White), Incandescent light), Custom                                                                                                                                                                                                                                                                                                                                        |
| Self-timer                               | Approx. 10 sec./2 sec. delay                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Flash                                    | Auto flash<br>Effective range: (ISO AUTO):<br>Normal: Wide angle: Approx. 40cm / 1.3 ft. to 8.7m / 28.5 ft.<br>Telephoto: Approx. 1.5m / 4.9 ft. to 4.8m / 15.7 ft.<br>Macro: Wide angle: Approx. 30cm / 1.0 ft. to 3m / 9.8 ft.<br>Telephoto: Approx. 80cm / 2.6 ft. to 3m / 9.8 ft.<br>Flash modes:<br>Red-eye removal OFF: Auto, Forced Flash, Suppressed Flash, Slow Synchro<br>Red-eye removal ON: Red-eye Reduction Auto, Red-eye Reduction & Forced Flash, Suppressed Flash, Red-eye Reduction & Slow Synchro |
| Electronic viewfinder                    | 0.2-inch, Approx. 200,000 dots FLCD monitor<br>(R/G/B colors are displayed in a single dot) Approx. 94% coverage                                                                                                                                                                                                                                                                                                                                                                                                     |
| LCD monitor                              | 2.7-inch, Approx. 230,000 dots,<br>TFT color LCD monitor, Approx. 97% coverage                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Movie recording                          | 640×480 pixels, 30 frames/sec.<br>320×240 pixels, 30 frames/sec.<br>With monaural sound, with Electronic Image Stabilization<br>*Zoom function cannot be used during movie recording.                                                                                                                                                                                                                                                                                                                                |
| Photography functions                    | Panorama shooting mode, Face detection (with red-eye removal), High speed shooting, Best framing, Post shot assist windows, Frame No.memory, Histograms                                                                                                                                                                                                                                                                                                                                                              |
| Playback functions                       | Slide show, Face detection (with red-eye removal), Trimming, Multi-frameplayback (with Micro thumbnail), Sorting by date, Image rotate, Voice memo, Histograms (Highlight warning)                                                                                                                                                                                                                                                                                                                                   |
| Video output                             | NTSC / PAL selectable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Digital input/output                     | USB 2.0 High speed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Power supply <sup>*4</sup>               | 4×AA type alkaline batteries (included), Ni-MH rechargeable batteries (optional) or Lithium batteries (optional), DC coupler CP-04 with AC power adapter AC-5VX (optional)                                                                                                                                                                                                                                                                                                                                           |
| Dimensions                               | 102.5 (W) × 73 (H) × 67.8 (D) mm / 4.1 (W) × 2.9 (H) × 2.7 (D) in. (excluding accessories and attachments)                                                                                                                                                                                                                                                                                                                                                                                                           |
| Weight                                   | Approx. 325g / 11.5 oz. (excluding accessories, batteries and memory card)                                                                                                                                                                                                                                                                                                                                                                                                                                           |

<sup>\*1</sup> Number of effective pixels: The number of pixels on the image sensor which receive input light through the optical lens, and which are effectively reflected in the final output data of the still image.  
<sup>\*2</sup> Please see the Fujifilm website to check memory card compatibility.  
<sup>\*3</sup> Exif 2.2 is a newly revised digital camera file format that contains a variety of shooting information for optimal printing.  
<sup>\*4</sup> Manganese dry, nickel-cadmium and lithium AA batteries cannot be used with this product.  
<sup>\*5</sup> \*CIPA DC-002:2003 'Standard Procedure for Measuring Digital Still Camera Battery Consumption' "(extract) Pictures shall be taken at a temperature of 23°C, with the LCD monitor turned on, the zoom moved from full wide-angle to full telephoto (or vice-versa) and back again to its original position every 30 seconds, the flash used at full power every second shot and the camera turned off and on again once every 10 shots.

Microsoft, Windows, and Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. xD-Picture Card™, SD logo and all other trademarks are the property of their respective holders.

FUNCTIONS



| Number of images / recording time |             |                        |           |           |           |         |                           |               |             |
|-----------------------------------|-------------|------------------------|-----------|-----------|-----------|---------|---------------------------|---------------|-------------|
| Modes                             | Still image |                        |           |           |           |         | Movie                     |               |             |
| Number of recorded pixels         | 3648×2736   | 3648×2432 (3:2 format) | 2592×1944 | 2048×1536 | 1600×1200 | 640×480 | Movie recording time sec. |               |             |
| Quality                           | JPEG Fine   | JPEG Normal            | JPEG      | JPEG      | JPEG      | JPEG    | VGA (30 fps)              | QVGA (30 fps) |             |
| Internal memory (Approx. 24MB)    | 5           | 9                      | 11        | 19        | 30        | 38      | 170                       | 29 sec.       | 46 sec.     |
| xD-Picture Card <sup>™</sup>      | 256MB       | 52                     | 103       | 116       | 202       | 319     | 399                       | 1777          | 4.7 sec.    |
|                                   | 512MB       | 104                    | 207       | 233       | 404       | 639     | 799                       | 3551          | 9.3 min.    |
|                                   | 1GB         | 209                    | 415       | 466       | 809       | 1279    | 1599                      | 7108          | 18.7 min.   |
|                                   | 2GB         | 418                    | 830       | 927       | 1599      | 2559    | 3199                      | 12796         | 36.8 min.   |
| SD memory card                    | 512MB       | 100                    | 199       | 222       | 386       | 606     | 754                       | 3438          | 9.0 min.    |
|                                   | 1GB         | 202                    | 402       | 452       | 784       | 1239    | 1549                      | 6885          | 18.1 min.   |
|                                   | 2GB         | 410                    | 815       | 910       | 1569      | 2511    | 3139                      | 12559         | 35.6 min.   |
| SDHC memory card                  | 4GB         | 801                    | 1592      | 1776      | 3064      | 4903    | 6129                      | 24518         | 70.5 min.*  |
|                                   | 8GB         | 1604                   | 3188      | 3557      | 6137      | 9819    | 12274                     | 49097         | 141.0 min.* |

Actual number of frames and recording time varies depending on the types of memory card or shooting conditions.  
\*A movie recording will stop automatically when the movie file size becomes approx. 2GB.

OPTIONAL ACCESSORIES

xD-Picture Card™ DPC-M512 / DPC-M1GB / DPC-M2GB  
PC Card Adapter DPC-AD  
Compact Flash™ Card Adapter DPC-CF  
AC Power Adapter AC-5VX  
DC coupler CP-04

Accessory availability may vary by country.  
Please check with your local Fujifilm representative to confirm product availability

ACCESSORIES INCLUDED

4×AA type Alkaline batteries / Shoulder strap / Lens cap / Lens cap cord /  
USB cable / A/V cable / CD-ROM: FinePixViewer / Owner's manual

Guide to number of available frames for battery operation

| Battery                      | LCD monitor status | Number of frames   |
|------------------------------|--------------------|--------------------|
| 4×AA type alkaline batteries | LCD monitor ON     | Approx. 300 frames |

According to the Camera & Imaging Products Association (CIPA) standards.\*5



For more information, please visit our Website:  
[http://www.fujifilm.com/products/digital\\_cameras/index.html](http://www.fujifilm.com/products/digital_cameras/index.html)

Specifications are subject to change without notice.  
All sample photos are simulated images.

FUJIFILM

FINEPIX S1000 *fd*

NEW



Compact, Lightweight, 12× Zoom!

10.0 Megapixels

12x Optical Zoom

2.7-Inch LCD





## World's Smallest 10.0-Megapixel 12x Long Zoom Digital Camera\*

The FinePix S1000fd is the world's smallest 10.0-megapixel long zoom digital camera, packed with high-performance features including 12x optical zoom lens, large 2.7-inch LCD and a host of versatile shooting functions. Sized to fit in your palm, the FinePix S1000fd lets you shoot beautiful, high-resolution photos with ease. \*As of January 2008; Fujifilm data



FINEPIX S1000 *fd*



# Dynamic Image Compact



## 12x Optical Zoom

FinePix S1000fd's 12x optical zoom lens expands your shooting reach, covering a remarkable focal range of 33-396mm\*, bringing you close enough to capture subtle expressions. And the single built-in lens means you're always ready to shoot, with no need for bulky extra lenses or time-consuming lens changes. \*35mm equivalent

### PS(Picture Stabilization) Mode

No more worry about blur from camera shake, even when shooting at maximum zoom range! Picture Stabilization mode automatically sets the optimum shutter speed and sensitivity for each scene, preventing blur from camera shake or fast-moving subjects, even in low-light situations.



FinePix S1000fd

### Super Macro

Super Macro mode lets you move in as close as approx. 2cm (0.8 inch) making it easy to take high-impact full-frame close-ups.



Super Macro



## Beautiful Photo Compact


## 10.0 Megapixels

Boasting a 10.0-megapixel CCD sensor, the FinePix S1000fd delivers high image quality that promises sharper, more brilliant, high-resolution pictures whatever the scene.

### High Sensitivity

With a maximum sensitivity of ISO 3200\*, scenes shot in low light appear more true to life. And high sensitivity means you can capture impressive stop-action images, even when the subject is moving at high speeds.

\*At ISO 3200, resolution is limited to a maximum 3 megapixels. At full resolution (10 megapixels), sensitivity is limited to a maximum ISO 1600.



FINEPIX S1000

# As-You-Like-It Compact

## NEW Panorama Mode


The new Panorama Shooting Mode\* makes it easy to create impressive panoramic photos. This mode captures and combines max 3 consecutive shots, which are saved to the memory card as a panoramic picture.

\*Use a tripod or monopod for best results. Only the panoramic picture is saved; individual photos are not. Picture size is 3M. Exposure and white balance are set with the first picture and flash is suppressed.




## Face Detection

Software-based Face Detection instantly identifies faces in the scene and automatically adjusts focus and exposure to ensure beautiful people pictures. Operating throughout the entire range of the 12x zoom lens, Face Detection can detect up to 6 faces at a time.

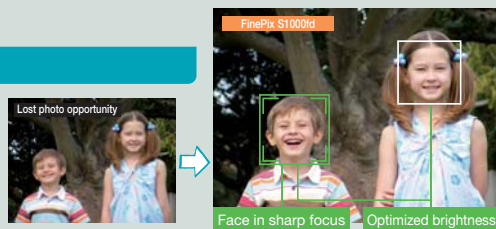

## Red-Eye Removal

The FinePix S1000fd automatically detects and corrects unsightly red-eye reflections that often spoil flash photos of people.



## Versatile Shooting Modes

A selection of tailored shooting modes provide ideal settings for everything from shutter speed and exposure to white balance. An intuitive interface lets you confirm settings on the LCD and provides brief text explanations that take the guesswork out of digital photography.

### Mode Dial

|                   |                        |                                 |                                |
|-------------------|------------------------|---------------------------------|--------------------------------|
| <b>AUTO</b> Auto  | <b>N</b> Natural Light | <b>SP1</b> Scene Position 1     | <b>SP2</b> Scene Position 2    |
| <b>P</b> Panorama | <b>P</b> Program Auto  | <b>A</b> Aperture Priority Auto | <b>S</b> Shutter Priority Auto |
| <b>M</b> Manual   | <b>M</b> Movie         |                                 |                                |

### Scene Position

|          |           |                       |        |           |
|----------|-----------|-----------------------|--------|-----------|
| Portrait | Landscape | Sport                 | Night  | Fireworks |
| Sunset   | Snow      | Beach                 | Museum | Party     |
| Flower   | Text      | Picture Stabilization |        |           |

## Long-Lasting Battery Power

Powered by alkaline batteries (included), the FinePix S1000fd delivers approx. 300 shots.



# Big-Screen Compact

## 2.7-inch LCD

A large, high resolution LCD with 230,000-dot resolution makes it easy to compose great shots and to see photo details when you play back captured images.

## Micro Thumbnail View

The high-resolution LCD can display up to 100 picture images simultaneously in 10x10 array. Use this micro thumbnail view to instantly select specific photos to view or print.



## Additional Features

### •xD/SD-Compatible

Compatibility with both xD Picture Card and SD/SDHC memory cards gives you added flexibility for recording, transfer and playback of photo images.



### •Movie recording with sound

•Electronic viewfinder with accurate color reproduction

FINEPIX S1000fd